


**NOTE:**  
 DRILL ANCHOR HOLE THRU IN-PLACE  
 ALT R230 FIELD MEMBRANE W/CARBIDE  
 TIPPED DRILL BITS USING HAMMER-DRILL  
 IN ROTO-HAMMER MODE. PROTECT ALT  
 MEMBRANE FROM MECHANICAL DAMAGE  
 DURING DRILLING & INSTALLATION OF  
 EPOXY ANCHOR.



4" (10cm)  
 (MIN.)

- 316 STAINLESS STEEL EPOXY-SET ANCHOR SIZED AS REQUIRED FOR BLOCKING ATTACHMENT (BY OTHERS)
- DEGREASE ANCHOR W/POLY ACTIVATOR & FLASH W/ALT R295 MATRIX RESIN 1/2" MIN. VERTICAL HEIGHT & EXTEND 4" MIN. HORIZONTAL ONTO TARGET.
- 6"X6" MIN. ALT R230 MEMBRANE TARGET FLASHING APPLIED OVER IN-PLACE ALT R230 FIELD MEMBRANE
- NEW TREATED WOOD BLOCKING & SHIMS AS REQUIRED. DRILL OVER-SIZED HOLE IN BLOCKING TO ALLOW CLEARANCE FOR POLY MATRIX BOLT FLASHING.
- NEW METAL COPING SYSTEM W/ PREFABRICATED CLIPS ANCHORED AS REQUIRED TO CONTINUOUS WOOD BLOCKING ONLY. (BY OTHERS)
- (1) PLY ALT R230 MEMBRANE FLASHING EXTEND 4" MIN. HORIZONTALLY ONTO PREPARED & PRIMED SUBSTRATE.
- PREPARE, LEVEL & PATCH SUBSTRATE W/ALT R290 PASTE OR ALT RS242 MORTAR AFTER PRIMING & PRIOR TO APPLICATION OF ALT R230 MEMBRANE (TYP.)
- ALT R230 RESIN BEAD TYPICAL @ ALL MEMBRANE TERMINATION POINTS.
- ALT R230 FIELD MEMBRANE

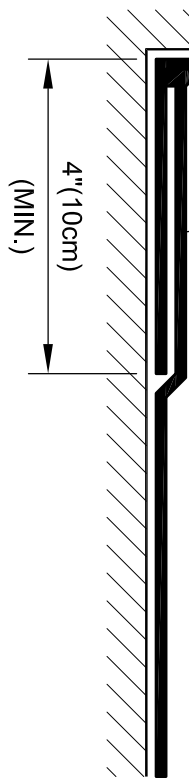

**TYPICAL PARAPET WALL FLASHING W/  
 NON-PENETRATING COPING ATTACHMENT**

REVISION	ISSUE DATE	SCALE	DRAWN BY
0	1-15-2010	N.T.S.	D.R.W.

DRAWING NO.:  
**B-3E**  
 AB\_03E